


# FIREPLACE DIMENSIONS

MODEL	WIDTH			HEIGHT				DEPTH		DAMPER	WEIGHT
	A	B	C	D	E	F	G	H	I		
	OPENING	FIREBOX REAR	OVERALL	OPENING	FIREBOX	SMOKE CHAMBER	OVERALL	FIREBOX	OVERALL		
<b>30" CONVENTIONAL</b>	32.5"	22"	38"	33.8"	37.5"	22.4"	59.9"	22.5"	28.5"	24"	1,800 LBS
<b>36" CONVENTIONAL</b>	38.5"	28"	44"	33.8"	37.5"	31.6"	69.1"	22.5"	28.5"	30"	2,150 LBS
<b>42" CONVENTIONAL</b>	44.5"	34"	50"	33.8"	37.5"	31.6"	69.1"	22.5"	28.5"	36"	2,410 LBS
<b>48" CONVENTIONAL</b>	50.5"	40"	56"	33.8"	37.5"	40.8"	78.3"	22.5"	28.5"	42"	2,900 LBS
<b>30" CALIFORNIA CONVENTIONAL</b>	32.5"	22"	38"	33.8"	37.5"	22.4"	59.9"	22.5"	28.5"	24"	1,700 LBS
<b>36" CALIFORNIA CONVENTIONAL</b>	38.5"	28"	44"	33.8"	37.5"	31.6"	69.1"	22.5"	28.5"	30"	2,100 LBS
<b>42" CALIFORNIA CONVENTIONAL</b>	44.5"	34"	50"	33.8"	37.5"	31.6"	69.1"	22.5"	28.5"	36"	2,400 LBS
<b>48" CALIFORNIA CONVENTIONAL</b>	50.5"	40"	56"	33.8"	37.5"	40.8"	78.3"	22.5"	28.5"	42"	2,750 LBS
<b>60" OVERSIZED CONVENTIONAL</b>	62.5"	52"	68"	33.8"	37.5"	31.6"	69.1"	22.5"	28.5"	54"	3,000 LBS
<b>72" OVERSIZED CONVENTIONAL</b>	74.5"	64"	80"	33.8"	37.5"	31.6"	69.1"	22.5"	28.5"	2 TOP SEAL	3,200 LBS
<b>30" RUMFORD</b>	32.5"	22"	38"	33.8"	37.5"	22.4"	59.9"	22.5"	28.5"	24"	1,700 LBS
<b>36" RUMFORD</b>	38.5"	28"	44"	42.4"	46.1"	31.6"	77.6"	22.5"	28.5"	30"	2,350 LBS
<b>42" RUMFORD</b>	44.5"	34"	50"	42.4"	46.1"	31.6"	77.6"	22.5"	28.5"	36"	2,650 LBS
<b>48" RUMFORD</b>	50.5"	40"	56"	51"	54.8"	40.8"	95.5"	22.5"	28.5"	42"	3,400 LBS
<b>60" LINEAR</b>	62.5"	52"	68"	25.1"	28.9"	31.6"	60.4"	22.5"	28.5"	54"	2,665 LBS
<b>72" LINEAR</b>	74.5"	64"	80"	25.1"	28.9"	31.6"	60.4"	22.5"	28.5"	2 TOP SEAL	2,825 LBS
<b>30" SEE-THROUGH</b>	32.5"	22"	38"	34.5"	38.3"	22.4"	60.6"	28.5"	28.5"	TOP SEAL	1,575 LBS
<b>36" SEE-THROUGH</b>	38.5"	28"	44"	34.5"	38.3"	31.6"	69.8"	28.5"	28.5"	TOP SEAL	1,800 LBS
<b>42" SEE-THROUGH</b>	44.5"	34"	50"	34.5"	38.3"	31.6"	69.8"	28.5"	28.5"	TOP SEAL	2,050 LBS
<b>48" SEE-THROUGH</b>	50.5"	40"	56"	34.5"	38.3"	40.8"	79"	28.5"	28.5"	TOP SEAL	2,350 LBS
<b>30" VENT FREE</b>	32.5"	22"	38"	33"	40.5"	N/A	40.5"	22.5"	28.5"	N/A	1,350 LBS
<b>36" VENT FREE</b>	38.5"	28"	44"	33"	40.5"	N/A	40.5"	22.5"	28.5"	N/A	1,500 LBS
<b>42" VENT FREE</b>	44.5"	34"	50"	33"	40.5"	N/A	40.5"	22.5"	28.5"	N/A	1,650 LBS
<b>48" VENT FREE</b>	50.5"	40"	56"	33"	40.5"	N/A	40.5"	22.5"	28.5"	N/A	1,800 LBS
<b>30" SEE-THROUGH VENT FREE</b>	32.5"	22"	38"	34.5"	42.3"	N/A	42.3"	28.5"	28.5"	N/A	1,300 LBS
<b>36" SEE-THROUGH VENT FREE</b>	38.5"	28"	44"	34.5"	42.3"	N/A	42.3"	28.5"	28.5"	N/A	1,400 LBS
<b>42" SEE-THROUGH VENT FREE</b>	44.5"	34"	50"	34.5"	42.3"	N/A	42.3"	28.5"	28.5"	N/A	1,500 LBS
<b>48" SEE-THROUGH VENT FREE</b>	50.5"	40"	56"	34.5"	42.3"	N/A	42.3"	28.5"	28.5"	N/A	1,600 LBS
<b>36" VENT FREE LITE</b>	38.5"	28"	44"	32"	38"	N/A	38"	19"	24"	N/A	850 LBS
<b>42" VENT FREE LITE</b>	44.5"	34"	50"	32"	38"	N/A	38"	19"	24"	N/A	925 LBS
<b>30" OUTDOOR - STRAIGHT</b>	32.5"	22"	38"	25.1"	28.9"	22.4"	75.3"	22.5"	28.5"	N/A	1,550 LBS
<b>36" OUTDOOR - STRAIGHT</b>	38.5"	28"	44"	33.8"	37.5"	22.4"	83.9"	22.5"	28.5"	N/A	1,860 LBS
<b>42" OUTDOOR - STRAIGHT</b>	44.5"	34"	50"	33.8"	37.5"	31.6"	105.1"	22.5"	28.5"	N/A	2,400 LBS
<b>30" OUTDOOR - ARCHED</b>	32.5"	22"	38"	29.8"	37.5"	22.4"	83.9"	22.5"	28.5"	N/A	1,650 LBS
<b>36" OUTDOOR - ARCHED</b>	38.5"	28"	44"	29.8"	37.5"	22.4"	83.9"	22.5"	28.5"	N/A	1,950 LBS
<b>42" OUTDOOR - ARCHED</b>	44.5"	34"	50"	29.8"	37.5"	31.6"	105.1"	22.5"	28.5"	N/A	2,350 LBS

All measurements listed are before firebrick is installed.

Dimensions are nominal and are given for design and framing reference only.

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decisions.

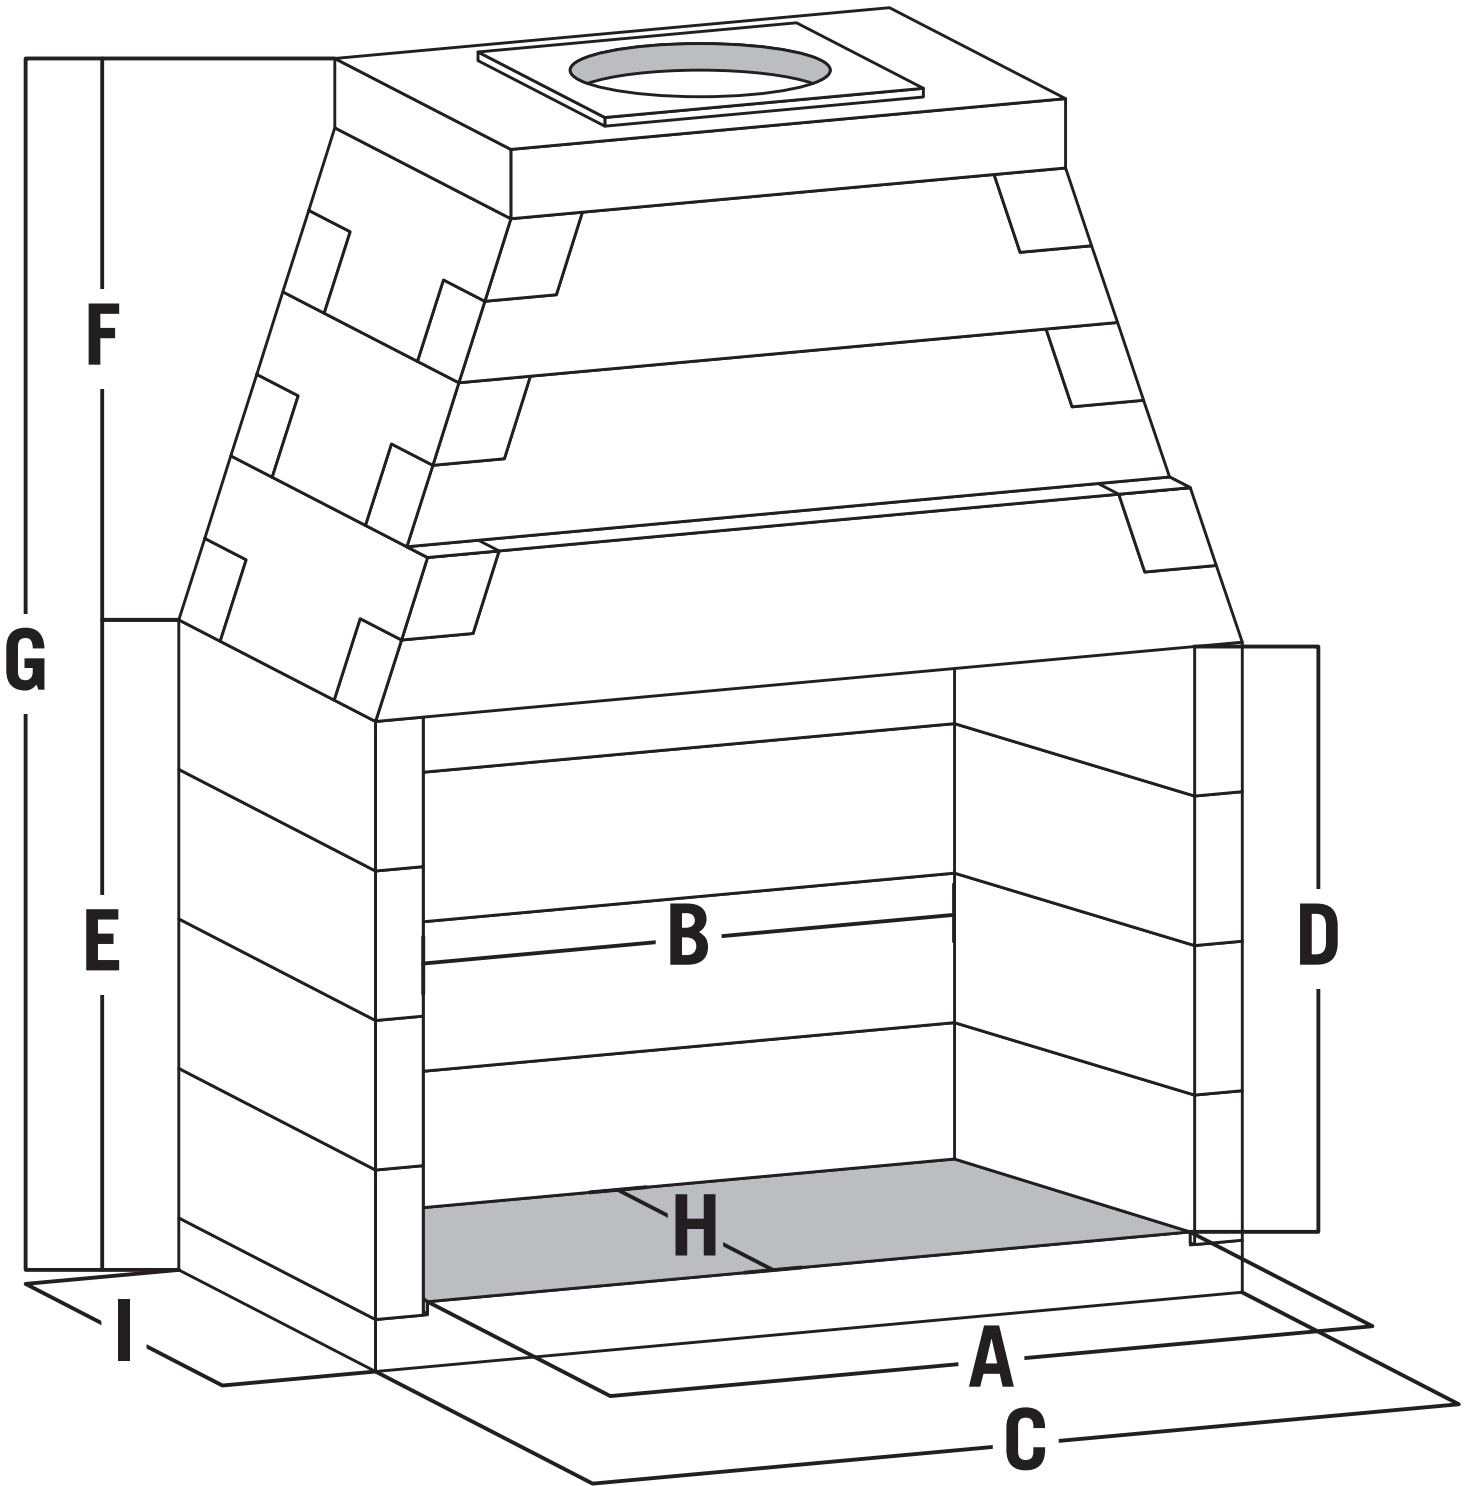

CORRELATE THE DIMENSIONS ON THE PREVIOUS PAGE WITH THE DIAGRAM ABOVE.